

TOWER BIMINI

INSTALLATION GUIDE



Important Notice:

- 1. Please take a few minutes to read the entire installation instructions and become familiar with the parts and installation before beginning to ensure a high quality, trouble free installation.
- 2. Please don't modify this product ,climb, ride or stand on it.
- 3. Please distinguish the front and rear side of the frame section.
- 4. The assembly can be easier done on the ground and need 2 people to finish it when install the frame onto the tower.
- 5. Tighten all hardware for completion.
- 6. Please be careful when your boat is approaching bridges or overpasses.
- 7. This tower bimini is designed to fit all LT wakeboard's towers and most other popular brand of towers, the following pictures show the position of the bimini rings on LTX tower.
- 8. Please don't move or rotate the mini clamps and cross fitting before you loose the set screws of them completely.


Care & maintenance:

- 1. Be sure to check and tighten all fasteners and connections prior to every use.
- 2. Use soap and water or general cleaner to clean the top.

Unpack the carton you will find below contents:

BIMINI FRAMES:


- A. Front frame section (1pc)
- B. Rear frame section (1pc)
- C. Rear middle frame bar (3pcs)
- D. Front support bars (2pcs)
- E. Middle frame side bars (2pcs)
- F. Front middle frame bar (1pc)

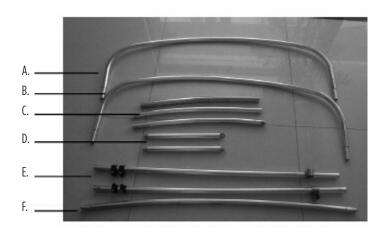

CANOPY:



BIMINI RINGS AND HARDWARE:



Lift fittings: need to purchase seperately if you need to install the bimini above your tower.

Step 1: Take out all bimini frame bars, and connect front/rear frame sections and middle frame side bars. (as the right picture)




Step 2: Install the rear middle frame bar.

Assemble the therear middle frame bar as shown in the right figures #1-#3. You can do it easily with the pin system.


Connect the rear middle frame bar on the frame through the cross fittings. Install the lift fittings on the rear frame bar. (as shown in the right figure #6)

Important note:

If you want to mount this bimini top under the top section of your wakeboard tower, please don't install the lift fittings.



Step 3: Install the front middle frame bar on the frame with the clamp A. The front support bars should be installed on the clamb B.



Step 4: Install the canopy.

Install the canopy on the frame as shown in the right pictures, you can do it easily with the zipper.

Assemble the front support bar on the clamp B as shown in the right picture.

Important note:

If you want to install this bimini top under the top section of your wakeboard tower, please refer to step5. If you want to install this bimini top above the top section of your wakeboard tower, please refer to step6.




Step 5: Install the bimini top under the top section of your wakeboard tower. Install the four bimini rings on the tower's bars as shown in the right pictures, but don't tighten the bolts of the rings.

Please measure the distance between the 2 rings mounted on the rear bars of tower, and adjust the pins to let the total length of rear frame bar to fit it.

Lift the bimini top, connect the rear middle frame bar with the rings mounted on the rear bars of the tower.

Connect the front support bars with the bimini rings mounted on the front bars of tower.

Now you have installed the tower bimini on the tower as you want. Please make a bit adjustment for the ring to get the best position, then tighten all of the bolts and set screws.



Step 6: Install the bimini top above on the tower. Mount two rings on the front bars of tower, and mount two rings on the top section as shown in the right pictures, but don't tighten the bolts of the rings.


Let the two intubations of the rear middle frame bar to hide inside the frame.

Lift the bimini top, Connect the two lift fittings with the rings mounted on the top section of the tower.

Connect the front support bars with the bimini rings mounted on the front bars of tower.

Now you have installed the tower bimini on the tower as you want.

Please make a bit adjustment for the ring to get the best position, then tighten all of the bolts and set screws.







JOBE Addict Bimini Warranty

Jobe Sports International warrants this product (not including other 3rd party accessories) against manufacturers defects. Anodizing and powder coated surfaces as well as all hardware corrosion are specifically excluded as their care and use cannot be controlled by Jobe Sports International. Any modifications or improper use shall void this warranty. Jobe Sports International is not responsible for personal injury or damage to the boat caused by the use of this bimini. JOBE's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. No dealer, retailer or manufacturer is the agent of Jobe Sports International and may not assume for Jobe Sports International any liability in connection with this warranty. This warranty is in lieu of all.

Distributed by:
Jobe Sports International
Heerewaardensestraat 30, 6624 KK Heerewaarden
The Netherlands WWW.JOBESPORTS.COM