


JOBBER ADDICT 1.1

INSTALLATION GUIDE

Check WWW.JOBESPORTS.COM for other languages of this manual

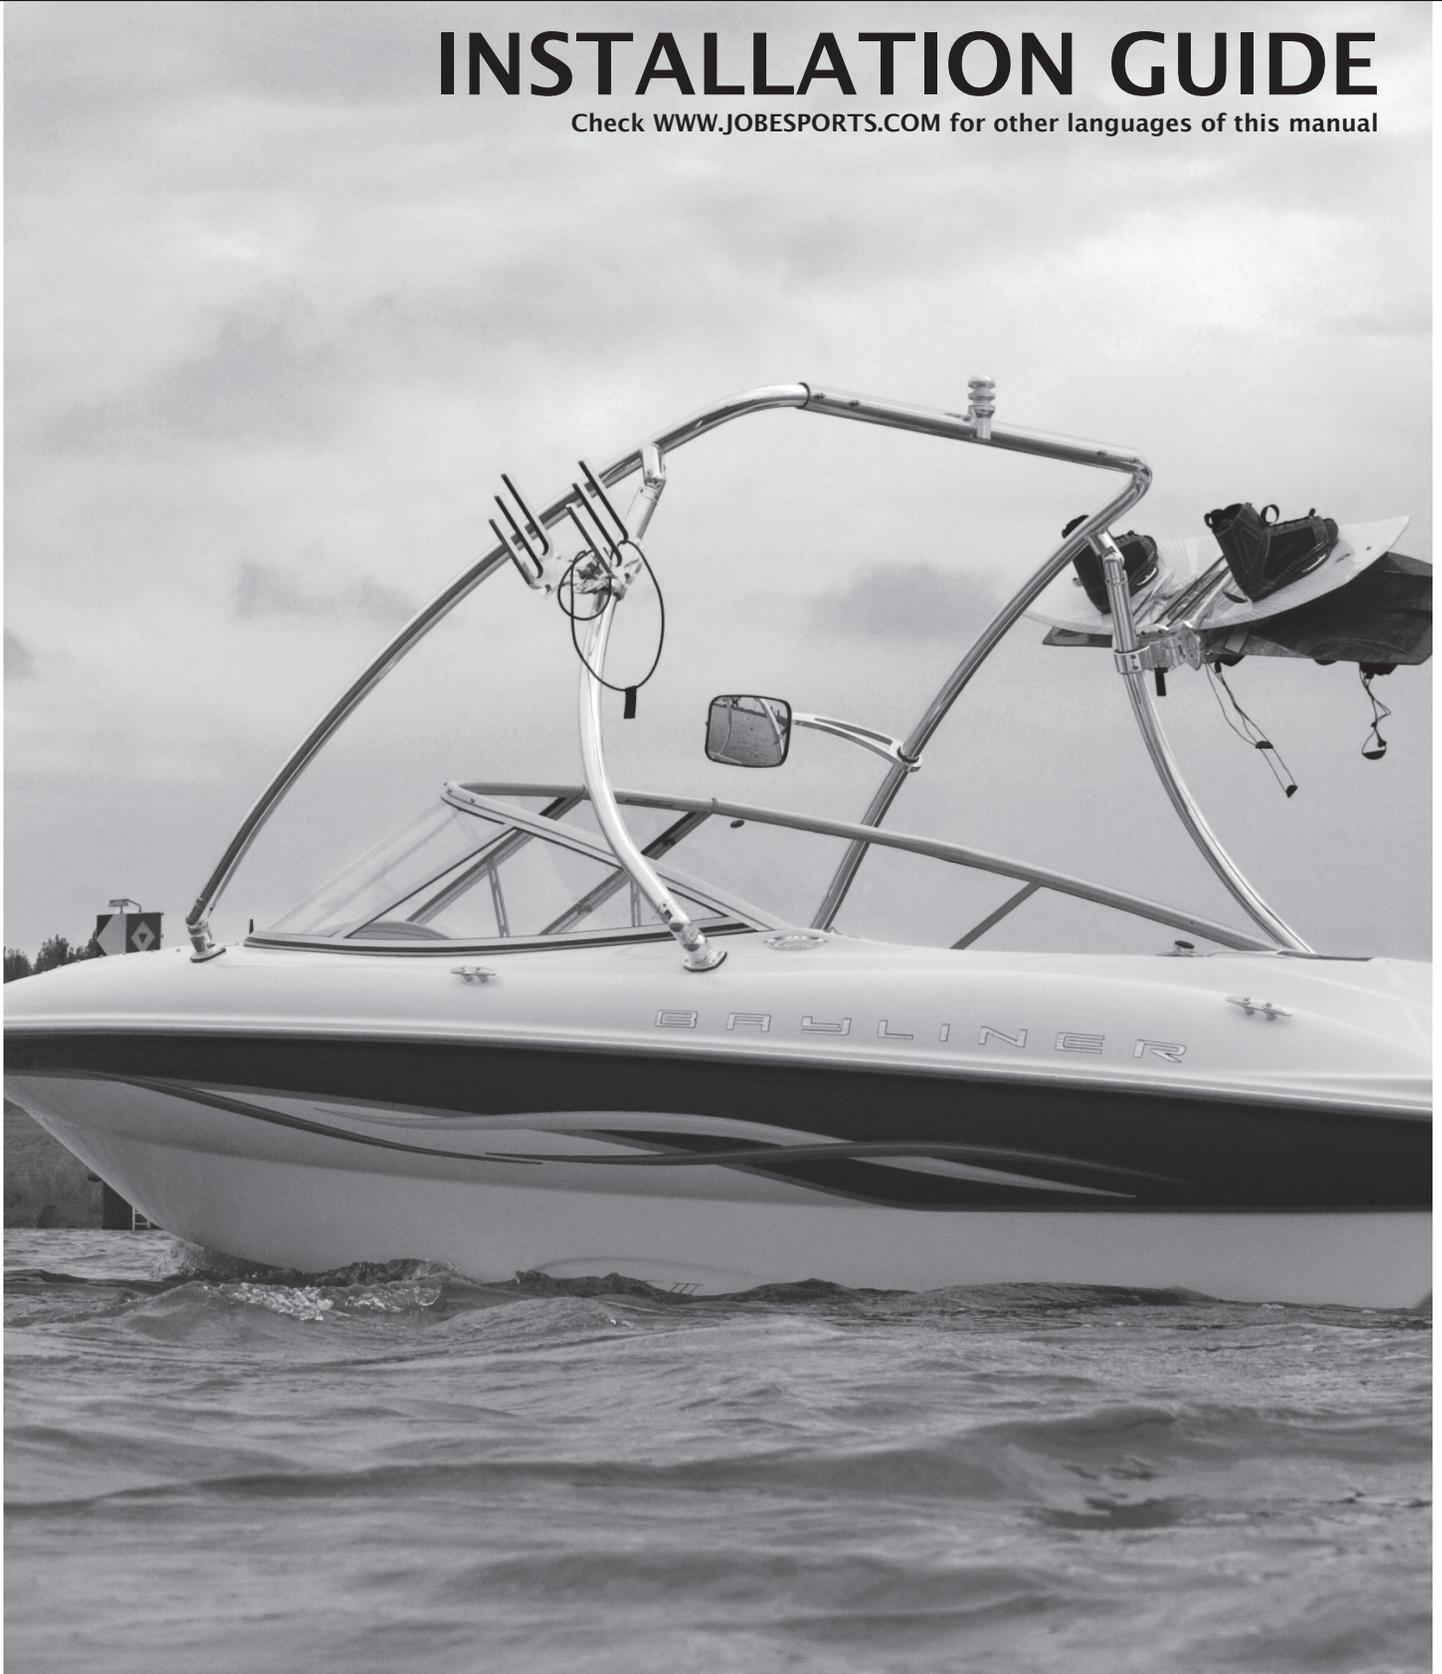

Operating under the theory that an ounce of prevention is worth a pound of headaches, here is some useful information that will prevent any scratching during the Addict Tower assembly.

As you are taking the 4 arms and top center section out of the box, place masking tape strips around the narrow top conjunction sections of the tubes that slide inside. This allows you to move and adjust the front tower tubes without scratching the surface. But please use caution when sliding the sections together.

Keep the masking tape in place through the final assembly step, then, after drilling, remove the masking tape and your finish will be perfect.


Note that this installation guide is only a guideline. Each boat is different and improvisation is needed to mount your Addict tower on your boat.

We advise you to have your tower mounted by a professional who has experience in boat constructions and mounting other towers.


Contents of Box

Unpack the carton, there will be 5 sections:

Tower Mount set

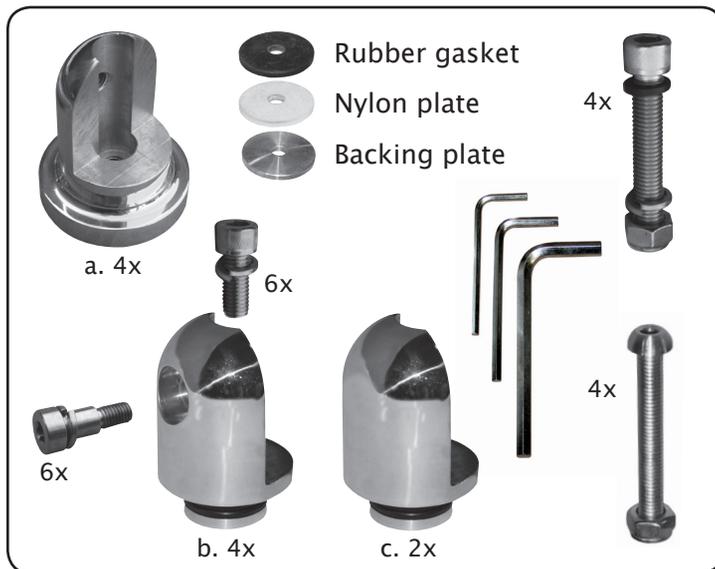

Tower Bars

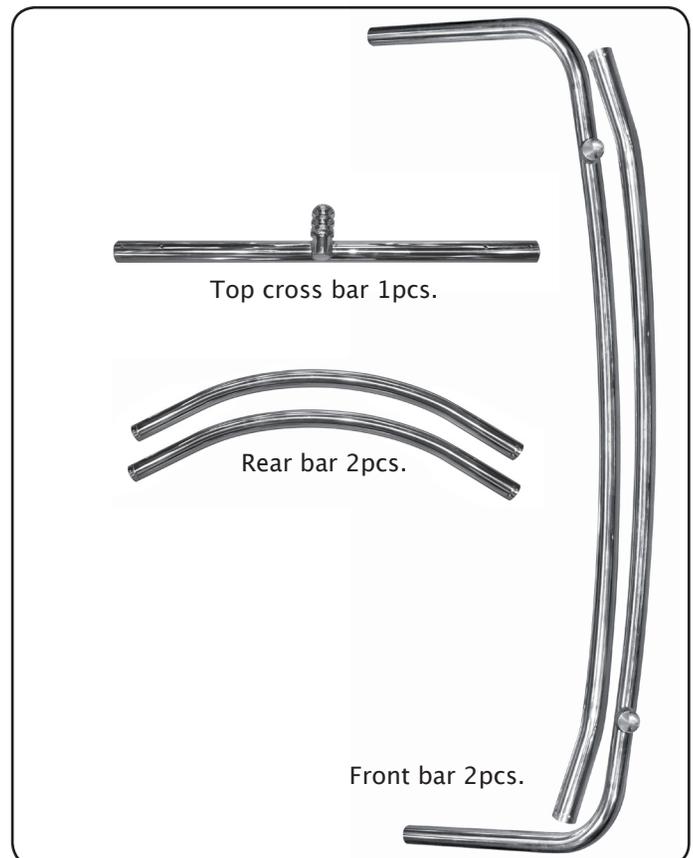

Prior to assembly, make sure all the required parts are present.

Necessities :

- Electric Drill
- Drill bit size 12 and 10
- Fork wrench
- Masking tape
- Chamfer drill bit

First decide if you want to do a top mount or a side mount.

Step 1

Cover the area where the mounting brackets will be placed with masking tape. This should be done in all areas where the tower will be mounted and the near surrounding area. This will help eliminate scratches to your boat while adjusting and measuring your tower attachment points.



Mask Mounting Area

Step2

Connect the front bar to the rear bar using the connectors b and c.

TIP: You can use Petroleum Jelly (Vaseline®) to grease the rubbers of the tower leg joints to prevent the rubbers from drying and it helps to insert the tower leg joints easily.

Always apply a thin film of Anti-Seize lubricant on all the male threads of the stainless steel hardware. This prevents the stainless steel hardware from galling and locking. Check/tighten the screws regularly before use.



Step 3


Use the semi-assembled tower to determine the correct position on the boat. Place the parts beside the boat to see what it will look like. Bear in mind the height in the boat, the windscreen window, additional tower accessories, wiring etc etc... The closer the front and the rear mounts are placed together, the higher the tower will be. When you have determined the correct position mark the position on the masking tape using the mounting brackets (a).

!Make sure the mounting brackets (a) are mounted completely level!

TIP : start +/- 20cm in front of the windscreen to determine the correct position.
This to ensure a possible mirror mount on the tower.


Step 4

After marking one side you can mark the other side using the mounting brackets. Make sure to make the mounting brackets on the direct opposite of the boat using fixed referation points of the boat.

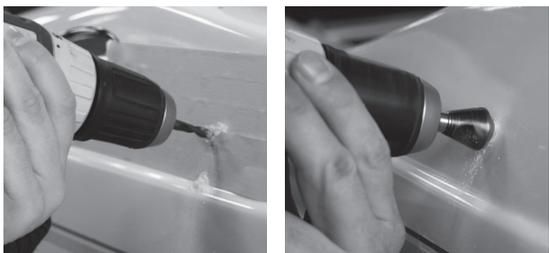

Step 5

Before drilling inspect the otherside of these locations for obstructions such as wires or cables and accessibility. You are now ready to drill the holes. For this use the drill bit size 12. After drilling the 4 holes, it is recommended to chamfer the holes using the chamfer drill bit, this prevents the gelcoat from cracking.



Step 6

IMPORTANT: When the BOAT DECK is less than 8mm thick we strongly advise to reinforce the mounting bracket with wood or fibreglass cloth. This prevents stress on the boat which causes the gelcoat to crack. **WARRANTY DOES NOT COVER:** Any cracks or other damage to the gelcoat or boat because of mounting the tower.



Step 7

Remove the masking tape and mount the mounting brackets with the rubber gasket. Don't fasten the screws at this time.


Step 8

Mount the front bar and the rear bar on the assembled mounting brackets, after that slide the overhead bar on the front bar with the towing point facing backwards.



Step 9

On the other side of the boat, slide the front bar in the top cross bar and attach it to the mounting bracket, after that you can also connect the rear bar to the mounting bracket. Make sure that the tower is in the correct position and that the towing point is centered and facing upwards.

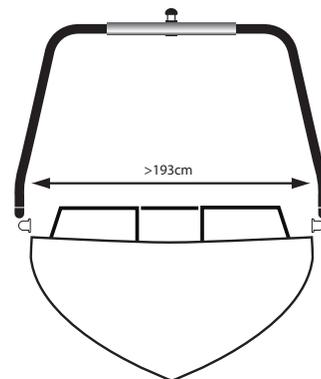

NOTE: When you have a narrow boat you probably need to shorten the overhead bar to make the tower fit to your boat.

Step 10

If the tower is in the correct position you can fasten all the bolts and screws.



Step 11


Finally fasten the top cross bar. In order to do this you have to drill holes through the top cross bar (these are predrilled) and the front bar, then fasten it with the 4 big bolts & nuts.

How to fold the tower

- I. Disconnect tower from front mounts
- II. Loosen the rear mounts
- III. Fold tower back to down position.

Care and Maintenance

- I. Be sure to check and tighten all fasteners and connections prior to every use.
- II. Be cautious when towing or driving under obstacles, low hanging structures or trees when your tower is mounted.
- III. Use soap and water or general cleaners to clean your tower. Avoid abrasive materials that might scratch the tower's surface.
- IV. Always rinse tower after contact with salt (brackish) water.
- V. We strongly recommend to use an anodized tower when using your boat on salt (brackish) water.

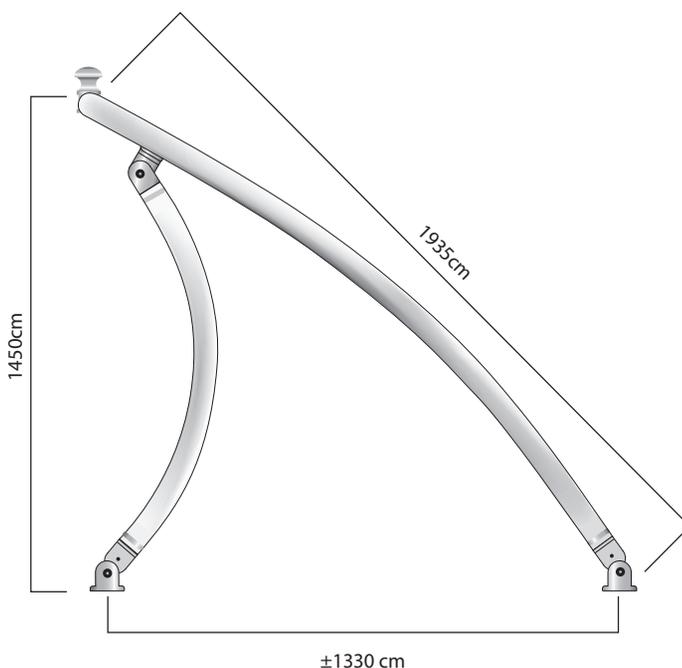

JOBE Addict Tower Warranty

Jobe Sports International warrants this product (not including other 3rd party accessories) against manufacturing defects. Anodized and powder coated surfaces as well as all hardware corrosion are specifically excluded as their care and use cannot be controlled by Jobe Sports International. Any modifications or improper use shall void this warranty. Jobe Sports International is not responsible for personal injury or damage to the boat caused by the use of this tower. JOBE's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. No dealer, retailer or manufacturer is Jobe Sports International's agent and may not assume any liability in connection with this warranty in name of Jobe Sports International. This warranty is in lieu of all.

Distributed by:

Jobe Sports International
Heerwaardensestraat 30
6624 KK Heerwaarden
The Netherlands
WWW.JOBESPORTS.COM